



BEER BLAST




BeerBlast[®] - Mixed Gas Dispense System

Mixed Gas Dispense System that redefines nitrogen generation technology for draft beer applications. Engineered for greater longevity and higher output, the new BeerBlast® provides the exact blend of CO2 and Nitrogen (N2), protecting the kegged product quality and ultimately increasing profitability and customer satisfaction.

How it works

The BeerBlast[®] generates highest quality Nitrogen by utilizing the only dual bed PSA technology available on today's market. It blends the correct ratio of N₂ and CO₂ to push the product from the keg to the faucet. This precise mixture of beer-gas eliminates over foaming or under carbonation, ensuring a quality product is consistently presented to the customer.





2940 Orville Wright Way, Wilmington, North Carolina 28405 • (888) 526 6284 www.southteksystems.com • Email: info@southteksystems.com

South-Tek

BeerBlast[®] - Mixed Gas Dispense System

- Generates beverage grade Nitrogen on site
- Eliminates over & under carbonation
- Provided with or without internal gas blender
- Compact technology takes up minimal space
- Maintains product quality as intended by the brewer

SPECIFICATIONS

- Increases customer satisfaction & loyalty
- Best value in Nitrogen Generation

BFFR BLAST

Patented BlastOff® - Leak Detection System


- Provided exclusively with the BeerBlast® technology
- Detects line leaks before they become catastrophic
- Minimizes risk of hazardous gas build up in keg box
- Eliminates untimely Nitrogen gas runouts
- Ensures kegs are properly tapped
- Maximizes lifespan of the BeerBlast®
- Saves time, money and aggravation

Patent #7,717,294

Green Technoloav 🏉

	ЗКРН	7КРН	14KPH
N2 Purity	99.8%+	99.8%+	99.8%+
Technology	Dual Bed PSA	Dual Bed PSA	Dual Bed PSA
N ₂ Production	5.2 SCFH	14.0 SCFH	24 SCFH
Max. kegs/hr.*	3	7	14
Max. pints/min.*	7.2	16.8	33.6
5 hr Surge (Kegs)	15	35	70
N2 Receiver Tank	28 Gallons	28 Gallons	15.5 Gallons
Mounting	Wall/Tank	Wall/Tank	Floor
Blender	Available with or without	Available with or without	Available with or without
Ambient Temp.	35 to 95° F	35 to 95° F	35 to 95° F
Electrical Amps	110V, 15 Amps	110V, 15 Amps	110V, 18 Amps
Noise level (dbA)	65	65	65
Dimensions N2 Generator	30" x 13" x 10"	30" x 13" x 10"	58" x 26" x 18"
Weight N2 Generator	75 lbs	85 lbs	275 lbs

*Calculations will vary based on keg pressure and the CO2/Nitrogen (N2) blend

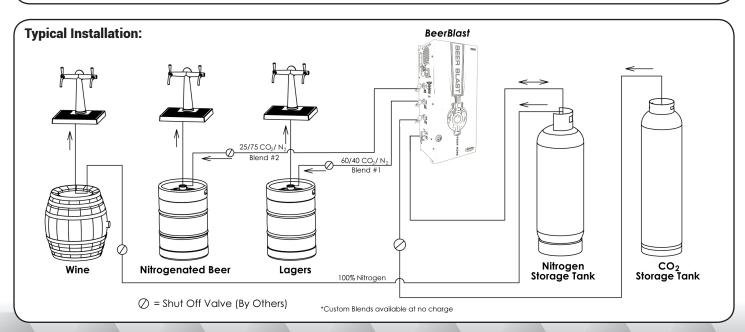

2940 Orville Wright Way, Wilmington, North Carolina 28405 • (888) 526 6284 www.southteksystems.com • Email: info@southteksystems.com

