




# O<sub>2</sub>-Release<sup>®</sup> Systems Wet Air Vent Solutions



## Dual Vent

Patent Pending

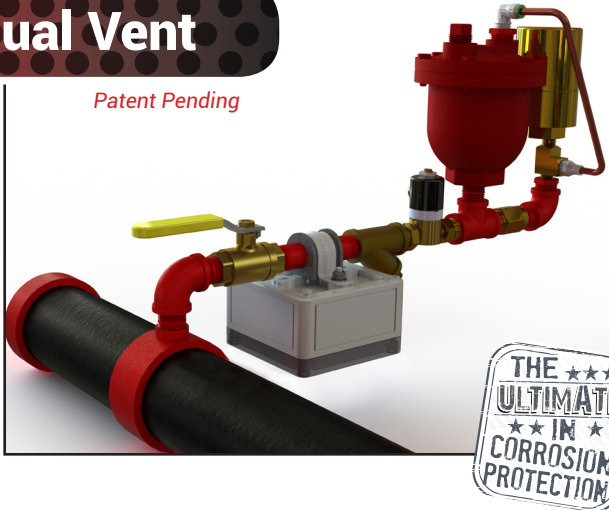

**The DeOx Dual Vent  
O<sub>2</sub>-Release<sup>®</sup> System**  
Now with FailSafe™ Technology -  
designed as a true water stop!

### Dual Vent O<sub>2</sub>-Release Features:

- Patent pending with FailSafe™ Redundancy
- FailSafe™ design works as a true water stop—water will not overflow as it would with other redundant vent designs
- Water accumulation fully drains back to FPS by simply depressurizing FPS and pressing reset button on Air Release Valve
- Lightweight design with low height clearance and only one connection to the piping makes for easy installation
- Primary Air Release Valve Failure Alarm with audible buzzer and visual LED indicator
- FM Approved Air Release Valve
- Meets NFPA 13 vent requirement

## Single Vent



### Single Vent O<sub>2</sub> Release Features:

- Displaces corrosive trapped air from within sprinkler piping
- Does not create a water trap—valve fully drains back to FPS
- Recommend (1) per high point of FPS
- Low clearance height - easy high point install
- FM Approved Air Release Valve
- Meets NFPA 13 vent requirement



**Corrosion Solutions**  
for Wet Fire Protection Systems

2940 Orville Wright Way, Wilmington, North Carolina 28405 • 888 526 6284 • [www.southteksystems.com](http://www.southteksystems.com)

