




O₂ Release[®] Systems
Wet Air Vent Solutions



Dual Vent

Patent Pending

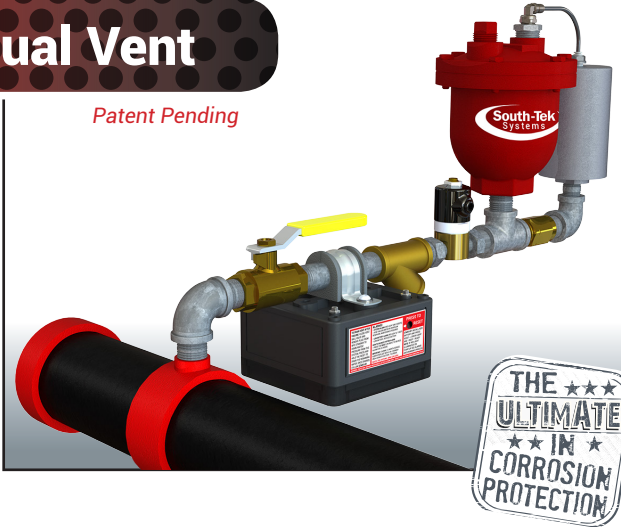

The DeOx Single and Dual Vent O₂ Release[®] Systems

Now with FailSafe™ Technology -
designed as a true water stop!

Dual Vent O₂ Release[®] Features:

- Patent pending
- FailSafe™ design works as a true water stop – water will not overflow as it would with other redundant vent designs
- Water accumulation fully drains back to FPS by simply depressurizing FPS and pressing reset button on Air Release Valve
- Lightweight design with low height clearance and only one connection to the piping makes for easy installation
- Primary Air Release Valve Failure Alarm with audible buzzer and visual LED indicator
- FM Approved Air Release Valve
- Meets NFPA 13 vent requirement

Single Vent



Single Vent O₂ Release[®] Features:

- Displaces corrosive trapped air from within sprinkler piping
- Does not create a water trap—valve fully drains back to FPS
- Recommend (1) per high point of FPS
- Low clearance height - easy high point install
- FM Approved Air Release Valve
- Meets NFPA 13 vent requirement



Corrosion Solutions
for Wet Fire Protection Systems



2940 Orville Wright Way, Wilmington, North Carolina 28405 • 888 526 6284 • www.southteksystems.com